

Technical Bulletin for Qbicle Fenders

Subject: Safety Notice on fender installations.

Qbicle fenders fit most of bike frame dropouts, however, under rare conditions of fender bracket being installed to dropouts, it is possible not to fit due to sizing factors. Please make sure the complete check as follows before consumers install to avoid any crash hazard or fall damage.


- Check notices 1-2-3 for front wheel.
- Check notice 3 for rear wheel.

If you have any questions, please contact Qbicle Inc. at:

sales@qbicle.com.tw

www.qbicle.com.tw

Check Notices 1-2-3

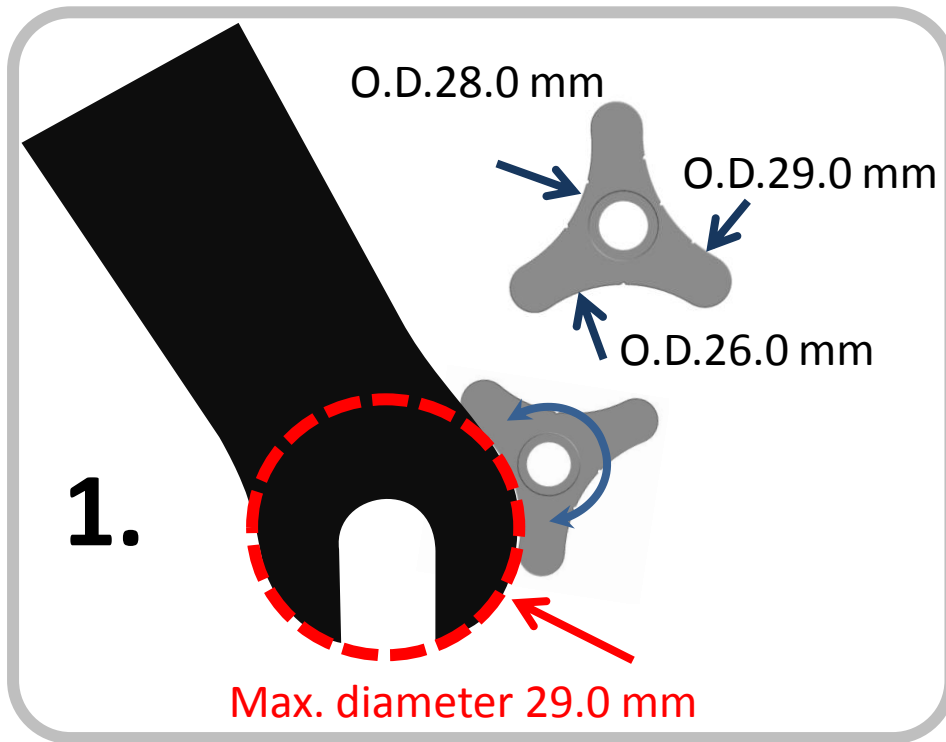

Check 1: Dropout diameter larger than 29.0mm is not fitting to fender installation.

Check 2: Enough toe tolerance is a must. **If racer's shoes is about to contact the fender, it means the toe tolerance is too short, then it is strongly prohibited to assemble this fender on front wheel which will pose a crash hazard while corning.**

Both of check notices are applied to fender installations on front wheel.

To prevent damage, please make sure of it in advance for riding safety concerns.

Check Notices 1-2-3

3.



Check 3: Rear/front wheel QR axle is requested to appear on the QR nut hole in order to make the fender bracket safely installed well. If not to see the QR axle appearing on the QR nut hole, it means no enough space for fender installation on frame dropouts. **To avoid to pose a crash hazard, the rear/front QR axle in enough length is a must for safety installation of the fender bracket.**

Remedy: Consumer can replace it with a new QR axle which is longer enough.

To install well and prevent a fall hazard, please make sure of it in advance for riding safety concerns.